


■ DIMENSIONS(mm) 外形图

Fig.1 $\Phi D=6.3\sim 10\text{mm}$

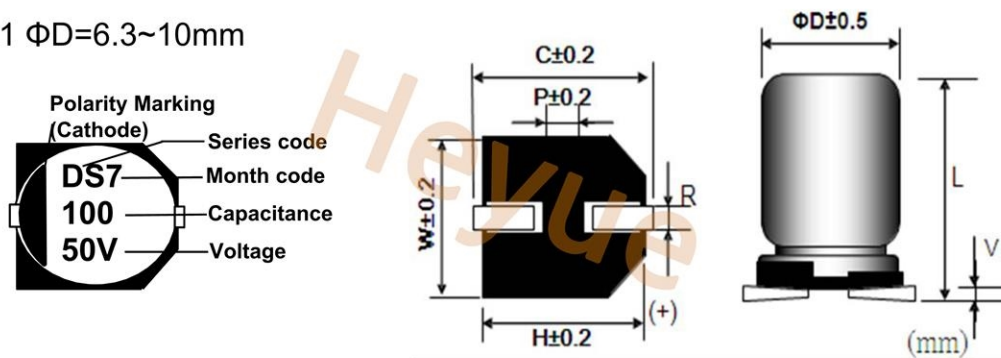

(mm)

Size	ΦD	L	W	H	C	R	P	Vmax
4x6.0	4.0	6.0 $\pm$ 0.3	4.3	4.3	5.1	0.5~0.8	1.0	0.3
5x6.0	5.0	6.0 $\pm$ 0.3	5.3	5.3	5.9	0.5~0.8	1.5	0.3
6.3x6.0	6.3	6.0 $\pm$ 0.3	6.6	6.6	7.2	0.5~0.8	2.1	0.3
6.3x7.7	6.3	7.7 $\pm$ 0.3	6.6	6.6	7.2	0.5~0.8	2.1	0.3
8x10	8.0	10 $\pm$ 0.5	8.4	8.4	9.0	0.7~1.1	3.2	0.3
10x10	10.0	10 $\pm$ 0.5	10.4	10.4	11.0	0.7~1.3	4.5	0.3

■ Standard ratings 标准品一览表

DxL(mm) ; R.C.(mA rms) at 105°C 100KHz, IMP(Ω max) at 20°C 100KHz.

Cap (μF)	V	6.3			10			16			25			35			50		
		D x L	R.C.	IMP	D x L	R.C.	IMP	D x L	R.C.	IMP	D x L	R.C.	IMP	D x L	R.C.	IMP	D x L	R.C.	IMP
10																	4x6.0	85	2.30
																	5x6.0	165	0.88
22											4x6.0	160	0.85	4x6.0	160	0.85	5x6.0	165	0.88
33											4x6.0	160	0.85	5x6.0	240	0.40			
47								4x6.0	160	0.85	5x6.0	240	0.36	5x6.0	240	0.36	6.3x6.0	195	0.68
68					4x6.0	160	0.85	5x6.0	240	0.36	5x6.0	240	0.36	6.3x6.0	300	0.26			
100		4x6.0	160	0.85				5x6.0	240	0.36	6.3x6.0	300	0.26	6.3x6.0	300	0.26	6.3x7.7	350	0.34
150					5x6.0	240	0.36	6.3x6.0	300	0.26	6.3x7.7	600	0.16	6.3x7.7	600	0.16			
220		5x6.0	240	0.36	6.3x6.0	300	0.26	6.3x6.0	300	0.26	6.3x7.7	600	0.16	8x10	850	0.12	8x10	670	0.18
330		6.3x6.0	300	0.26	6.3x7.7	600	0.16	6.3x7.7	600	0.160				8x10	850	0.08	10x10	900	0.12
470		6.3x7.7	600	0.16	6.3x7.7	600	0.16				8x10	850	0.08						
560														10x10					
680		6.3x7.7	600	0.16				8x10	850	0.08									
820											10x10	1190	0.06						
1000					8x10	850	0.08	10x10	1190	0.06									
1500		8x10	850	0.08	10x10	1190	0.060												
2200		10x10	1190	0.06															

注：以上所提供的设计及特性参数仅供参考，任何修改不作预先通知，如有使用上任何疑问，请在采购前与我们联系，以便提供技术上的协助。